


Network Configurator

- Programming software for creating safety circuits
- Used to configure Safety Network Controllers and Safety I/O Terminals
- Provides safety circuit programming functions
- Provides monitoring functions for safety circuits
- Includes DeviceNet Configurator functions

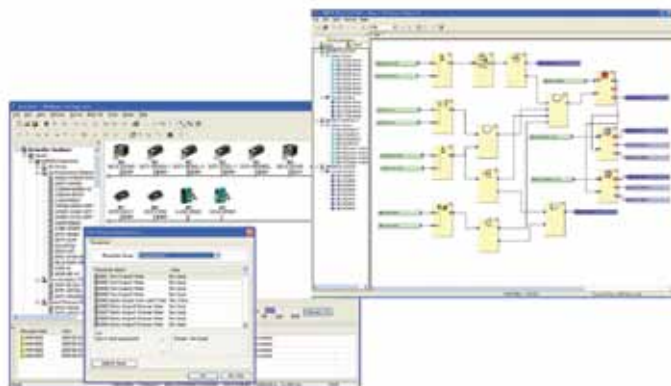

Specifications

Applicable computer	IBM PC/AT or compatible
CPU	Intel Pentium PC, 300 MHz or higher (Pentium III, 1-GHz or higher recommended)
OS	Microsoft Windows 2000 Microsoft Windows XP Microsoft Windows Vista**
Supported languages	English
RAM	256 MB or higher
Hard disk	At least 200 MB of available hard disk space
Monitor	S-VGA or better display capability
CD-ROM	One CD-ROM drive min.
Communications ports	One of the following communications ports is required. • USB port Connecting online via the USB port (USB 1.1) of the NE1A-SCPU-series Controllers • DeviceNet Interface Card 3G8E2-DRM21-V1: Connecting online via DeviceNet

Note: Windows is a registered trademark of Microsoft.

IBM is a registered trademark of International Business Machines Corp.

Ordering

Name	Components	Applicable computer	Applicable OS	Model
Network Configurator	Installation disc (CD-ROM: 1 license)	IBM PC/AT or compatible	Windows 2000 Windows XP Windows Vista**	WS02-CFSC1-E
	Upgrade disc (CD-ROM: 1 license)*			WS02-CFSC1-E-UP

*We recommend you use the upgrade disk if you are using a version earlier than version 2.0.

**Windows Vista (32-bit) is supported in versions 2.20 and later.

Note: If you are using a version 2.0, you can upgrade to the latest 2.xx version of the software at www.sti.com.

 = Highlighted **Rapid Delivery** products are available for shipment today or within **FIVE** days.